TOOL TRENDS Isotrics

KATI® BLITZ COMPACT The cable pull system for professionals. Now in black!

Available from October 2018

A new design in our tried and trusted quality!

An attractive looking tool with impressive functionality: The Kati[®] Blitz makes it possible to pull cables through cable ducts even under the most difficult conditions. It passes through longstretches with tight bends with ease, even in pipesystems where cables have already been laid. Its attractive design is an added bonus. The Kati[®] Blitz compact helps where other pulling aids wouldn't have chance!

Kati[®] Blitz compact Cable pulling with ease

- With the tried and trusted Polykat[®] fibreglass rod in impact resistant housing (20m, 30m, or 50m)
- Internal, rotating storage drum
- With integrated accessory set
- With a special Kati® Grip gripping aid
- Each with a guide head 7–10 mm ø
- 3 Rod ends and 2 rod ends 2.0 on the rod
- 3 Connecting sleeves
- 5 Cable lugs
- 1 Cable draw grip
 6 9 mm ø
- 1 Fibreglass fix adhesive (3 g bottle)

CIMCO-item no. 14 2020 CIMCO-item no. 14 2024 CIMCO-item no. 14 2028

20 m 30 m 50 m



Kati[®] Blitz Compact accessories

Kati[®] Blitz EASY GRIP

- Allows 3 mm fibreglass rods to be inserted and pulled out of empty conduits, saving energy and preventing fatigue
- Max. thrust power: 20 kg

CIMCO-item no. 14 2180



Flexible guide head 2.0

- Optimal force application of bending forces
- Is not subject to material fatigue as with, for example, a spring guide head
- The optimal tool for passing through very tight bends when combined with the 2.0 rod end



• Bending radii up to 30 mm are possible

 CIMCO-item no. 14 1072
 7 mm Ø

 CIMCO-item no. 14 1073
 10 mm Ø

 CIMCO-item no. 14 1074
 13 mm Ø

 CIMCO-item no. 14 1078
 Set of 7, 10, 13 mm Ø

Cable lug

- Made of brass
- With internal thread M 5
- Suitable for all lengths, also including all Kabelmax[®] devices



CIMCO-item no. 14 2144

Cable draw grip

- With swivel
- With internal thread M 5
- For cable 6–9 mm ø

CIMCO-item no. 14 2152

Kati[®] Blitz replacement bar

• For Kati[®] Blitz compact and Kati[®] Blitz 2.0, with 2 rod ends 2.0



CIMCO-item no. 14 2120	20 m
CIMCO-item no. 14 2122	30 m
CIMCO-item no. 14 2124	50 m

Rod ends 2.0

- Made of brass, with plastic sleeve
- With external thread M 5
- Suitable for all lengths



Spring guide head

- Made of brass
- With internal thread M 5
- Suitable for all lengths, also including all Kabelmax[®] devices



CIMCO-item no. 14 2130	7 mm ø
CIMCO-item no. 14 2132	10 mm ø
CIMCO-item no. 14 2134	13 mm ø
CIMCO-item no. 14 2140	Set of 7, 10, 13 mm ø

Kati[®] Blitz service set 2.0

• 12 piece set of accessories and spare parts for all Kati[®] Blitz products, made up of

3 rod ends 2.0	14 10	070
5 cable lugs	14 21	144
3 connecting lugs	14 2′	146
1 fibreglass special adhesive	14 2	192
	6	
(Internet)		

CIMCO-item no. 14 1080

Connecting sleeve

• Made of brass, suitable for all lengths



CIMCO-item no. 14 2146





Kati[®] Blitz Mini

Kati[®] Blitz Mini has been especially developed to meet the growing demands for retrospective fibre optic cable installations in existing, already occupied empty conduits. Laying fibre optic cables is made easier or even made possible by using the Kati[®] Blitz Mini. Apart from the small diameter, the specially developed Polykat[®] Mini fibreglass profile features high rod strength and thrust stability, as well as a very small bending radius of 15 mm. Combined with the flexible guide head Mini and a low-friction guide hose, the insertion process is quick and easy.

Product advantages at a glance:

- Flexible guide head Mini: Special contour for getting through narrow spaces and around tight bends
- Rotating rod cassette: The rod is pushed into the empty conduit by rotating the cassette
- Axle bearing cassette: High reset force of the Polykat[®] Mini supports automatic unwinding of the rod
- Guide tube: Protects and guides the profile when inserting, considerably reduces the risk of rod breakage when retracting
- Grip plate with rod stop: Prevents the rod unwinding when not in use

Accessories supplied:

- 5 Flexible guide heads M 2.5 with internal thread
- 7 Rod ends M 2.5 with external thread
- 1 Guide tube 2.5 m with fastening sleeve
- 1 Insulating tape 15 mm to attach the fibreglass cable to the flexible guide head
- 1 Sanding pad 50 x 50 mm
- 1 Special adhesive, 3 g

CIMCO-item no. 14 2060	15 m
CIMCO-item no. 14 2062	25 m
CIMCO-item no. 14 2064	35 m

In our **main catalogue starting on page 103** you will find more cable pull systems, such as the PowerDrive cable pull system, the Kabelmax[®] underfloor cable pull system or the Kabeljet[®] variable cable pull system!




KATI" BLITZ HIN

cimco




Kati[®] Blitz Mini accessories

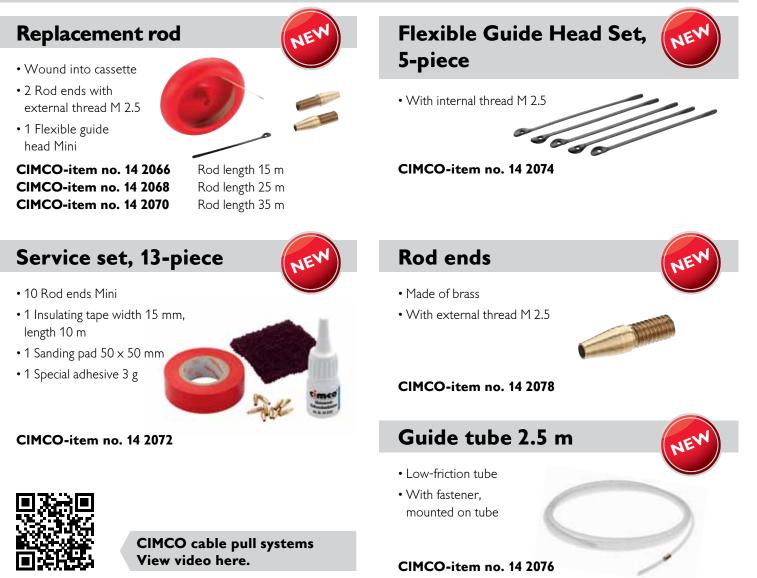

EXPERT TIP

The combination of extreme bending strength and maximum thrust stability provides the Polykat[®] fibreglass rod with the characteristics of a flexible rod. As a result, extremely small bending radii are possible and tight pipe bends can be passed through easily. The smooth plastic coating has excellent sliding properties and reduces the friction resistance to a minimum. It is characterised by high wear resistance. The high elasticity of Polykat[®] fibreglass rods facilitates the construction of unrivalled small, compact and handy devices.

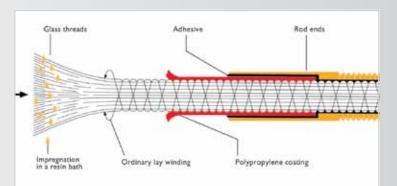





Technical modifications, colour deviations, price changes, errors and misprints reserved. Offer only val while stocks last. All prices are quoted exclusive of statutory VAT – Sale only via specialist wholesalers. GB7-18